



0,5 mm



Sandgrå



Svart



Indigo Blå



Arctic Grå



Vit V



Vit S



Ljusgrå



Ljust ek



Brun ek



Mörk ek



Grafitgrå



Valnöt



● 27 x 11 mm



● ○ 9 mm



20 x 600 x 2400 (+/- 2 mm)



13 mm



1,44 m²




10,2 (+/- 10%)


Passande FJORDWALL tillbehör:

- Monteringskruvar 4,5 x 45 mm, svarta/vit
- Monteringslim 290 ml


Figur 1:

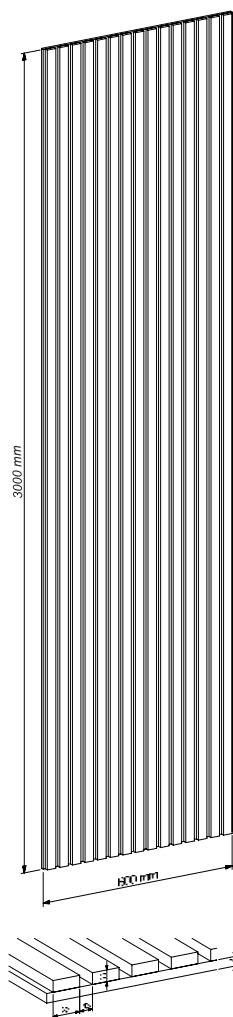

Figur 2:

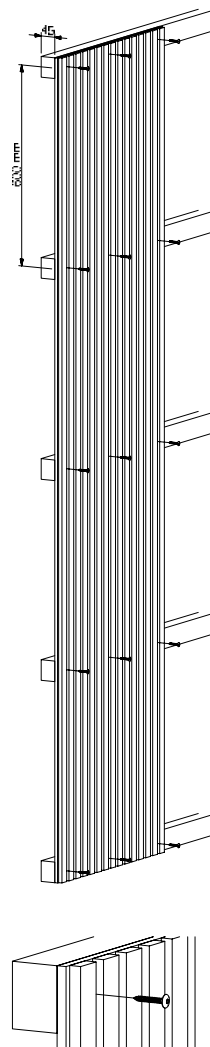


Frequency [Hz]	α_s
100	0.09
125	0.22
160	0.30
200	0.53
250	0.56
315	0.87
400	0.99
500	1.97
630	0.97
800	1.02
1k	1.02
1.25k	0.91
1.6k	0.90
2k	0.87
2.5k	0.80
3.15k	0.81
4k	0.77
5k	0.71

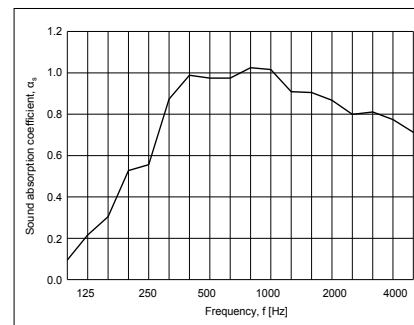

Ljudtest Figur 3:
Montering: 45 mm luftavstånd bakom panelen.
Stängd ram runt kanten.

Testområde:: 10,8 m²
Rumsvolym: 215 m³
Rumyta: 305 m²

Frequency [Hz]	α_s
100	0.02
125	0.02
160	0.02
200	0.05
250	0.05
315	0.11
400	0.16
500	0.26
630	0.32
800	0.46
1k	0.63
1.25k	0.78
1.6k	0.97
2k	1.11
2.5k	1.05
3.15k	0.88
4k	0.75
5k	0.68

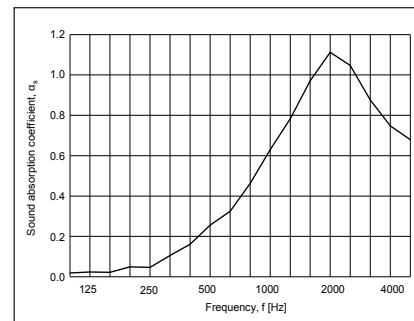

Ljudtest Figur 4:
Montering: De 11 panelerna ligger platt på
betonggolvet i ekotestrummet.
Stängd ram runt kanten.

Testområde: 10,8 m²
Rumsvolym: 215 m³
Rumyta: 305 m²