



0,5 mm



Ask



Ek



Rökt Ek



Valnöt



Ekfittgrå



Ekgrey



Oljad Ek



Oljad Valnöt



Bok



Rustik Ek



Svart Oljad Ek



Mahogny



● ● 27 x 11 mm



● ● 9 mm



20 x 600 x 2400 mm (+/- 2 mm)



13 mm



1,44 m²




14,2 kg (+/- 10%)


Passande FJORDWALL tillbehör:

- Monteringskruvar 4,5 x 45 mm, svarta, grå
- Monteringslim 290 ml


Figur 1:

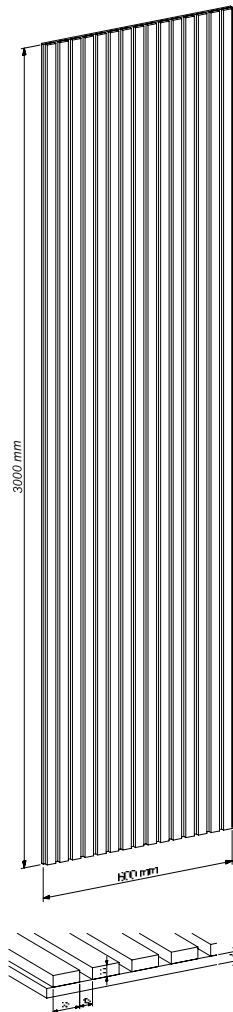

Figur 2:

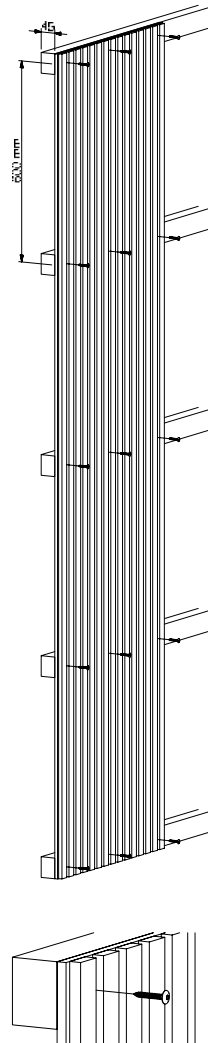


Frequency [Hz]	α_s
100	0.09
125	0.22
160	0.30
200	0.53
250	0.56
315	0.87
400	0.99
500	1.97
630	0.97
800	1.02
1k	1.02
1.25k	0.91
1.6k	0.90
2k	0.87
2.5k	0.80
3.15k	0.81
4k	0.77
5k	0.71

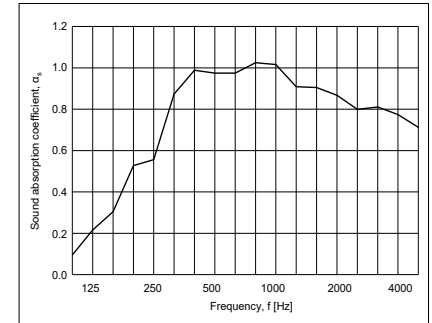

Ljudtest Figur 3:
Montering: 45 mm luftavstånd bakom panelen.
Stängd ram runt kanten.

Testområde:: 10,8 m²
Rumsvolym: 215 m³
Rumyta: 305 m²

Frequency [Hz]	α_s
100	0.02
125	0.02
160	0.02
200	0.05
250	0.05
315	0.11
400	0.16
500	0.26
630	0.32
800	0.46
1k	0.63
1.25k	0.78
1.6k	0.97
2k	1.11
2.5k	1.05
3.15k	0.88
4k	0.75
5k	0.68

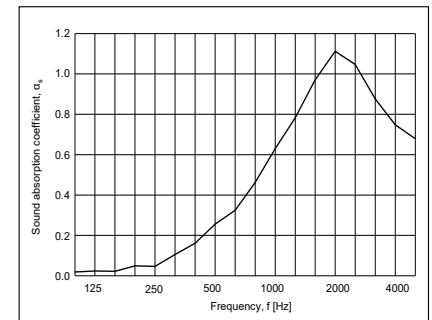

Ljudtest Figur 4:
Montering: De 11 panelerna ligger platt på
betonggolvet i ekotestrummet.
Stängd ram runt kanten.

Testområde: 10,8 m²
Rumsvolym: 215 m³
Rumyta: 305 m²