



0,5 mm



Ek



Valnöt



Rökt Ek



Vit Ek



40 x 11 mm



9 mm



20 x 600 x 2400 mm (+/- 2 mm)



13 mm



1,44 m<sup>2</sup>




11,4 kg (+/- 10%)


## Passande FJORDWALL tillbehör:

- Monteringskruvar 4,5 x 45 mm, svarta
- Monteringslim 290 ml
- Avslutningslister


Figur 1:

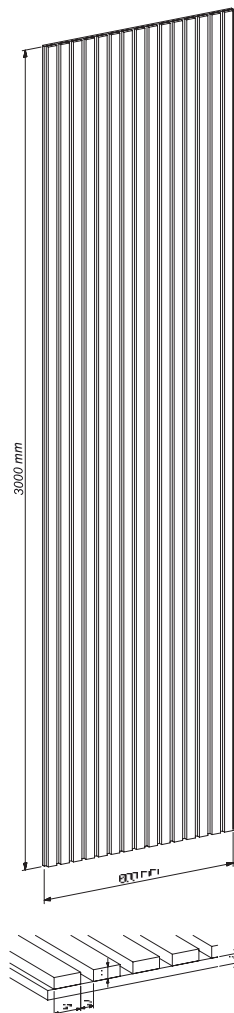

Figur 2:

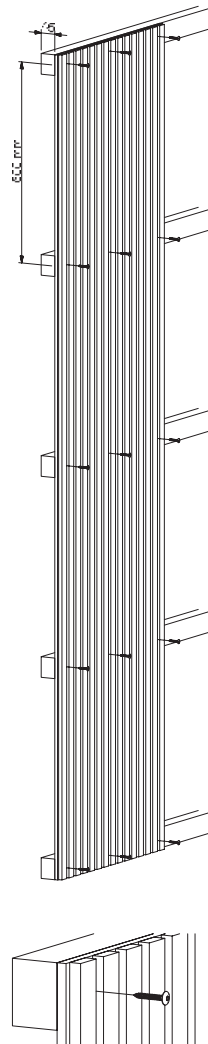


Frequency [Hz]	$\alpha_s$
100	0.09
125	0.22
160	0.30
200	0.53
250	0.56
315	0.87
400	0.99
500	1.97
630	0.97
800	1.02
1k	1.02
1.25k	0.91
1.6k	0.90
2k	0.87
2.5k	0.80
3.15k	0.81
4k	0.77
5k	0.71

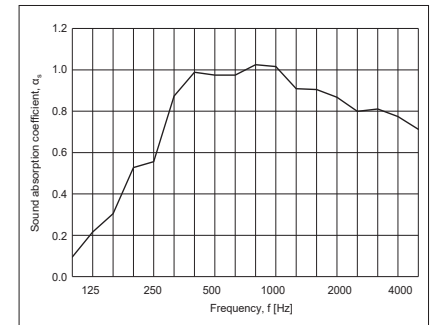

Ljudtest Figur 3:  
 Montering: 45 mm luftavstånd bakom panelen.  
 Stängd ram runt kanten.

Testområde:: 10,8 m<sup>2</sup>  
 Rumsvolym: 215 m<sup>3</sup>  
 Rymyta: 305 m<sup>2</sup>

Frequency [Hz]	$\alpha_s$
100	0.02
125	0.02
160	0.02
200	0.05
250	0.05
315	0.11
400	0.16
500	0.26
630	0.32
800	0.46
1k	0.63
1.25k	0.78
1.6k	0.97
2k	1.11
2.5k	1.05
3.15k	0.88
4k	0.75
5k	0.68

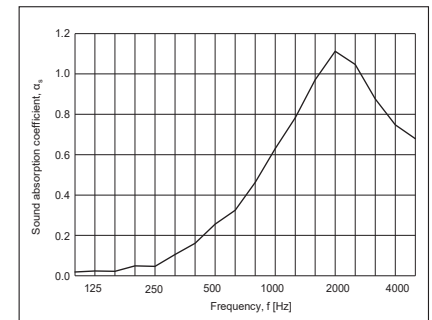

Ljudtest Figur 4:  
 Montering: De 11 panelerna ligger platt på  
 betonggolvet i ekotestrummet.  
 Stängd ram runt kanten.

Testområde: 10,8 m<sup>2</sup>  
 Rumsvolym: 215 m<sup>3</sup>  
 Rymyta: 305 m<sup>2</sup>