 0,5 mm



Ek



Valnöt




Rökt Ek



Ask


  40 x 11 mm

  9 mm

 20 x 600 x 2400 mm (+/- 2 mm)

 13 mm


 1,44 m²

 11,4 kg (+/- 10%)


Passande FJORDWALL tillbehör:

- Monteringskruvar 4,5 x 45 mm, svarta
- Monteringslim 290 ml
- Avslutningslister


Figur 1:

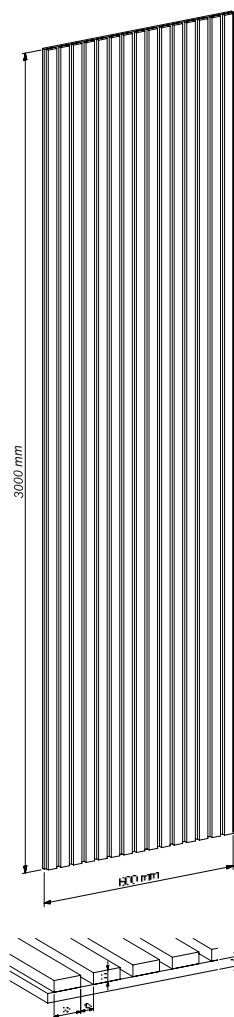

Figur 2:

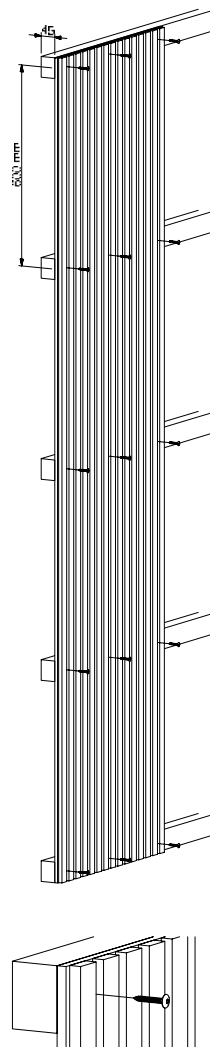


Frequency [Hz]	α_s
100	0.09
125	0.22
160	0.30
200	0.53
250	0.56
315	0.87
400	0.99
500	1.97
630	0.97
800	1.02
1k	1.02
1.25k	0.91
1.6k	0.90
2k	0.87
2.5k	0.80
3.15k	0.81
4k	0.77
5k	0.71

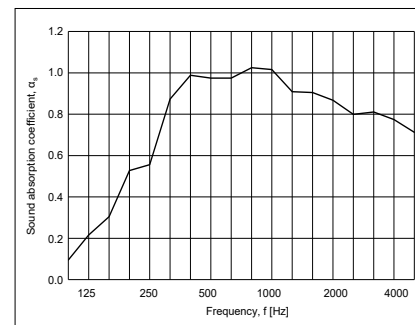

Ljudtest Figur 3:
Montering: 45 mm luftavstånd bakom panelen.
Stängd ram runt kanten.

Testområde:: 10,8 m²
Rumsvolym: 215 m³
Rumyta: 305 m²

Frequency [Hz]	α_s
100	0.02
125	0.02
160	0.02
200	0.05
250	0.05
315	0.11
400	0.16
500	0.26
630	0.32
800	0.46
1k	0.63
1.25k	0.78
1.6k	0.97
2k	1.11
2.5k	1.05
3.15k	0.88
4k	0.75
5k	0.68

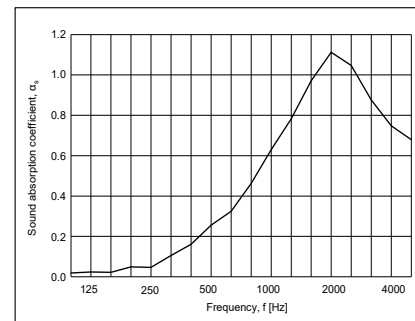

Ljudtest Figur 4:
Montering: De 11 panelerna ligger platt på
betonggolvet i ekotestrummet.
Stängd ram runt kanten.

Testområde: 10,8 m²
Rumsvolym: 215 m³
Rumyta: 305 m²