 0,5 mm



Eg



Valnød




Røget Eg




Ask


 ~~40 x 11 mm~~

 ● 9 mm

 20 x 600 x 2400 mm (+/- 2 mm)

 13 mm


 1,44 m<sup>2</sup>

 11,4 kg (+/- 10%)


Passende FJORDWALL tilbehør:

- Montageskruer 4,5 x 45 mm. sort
- Montagelim 290 ml.
- Afslutningslister


Figur 1:

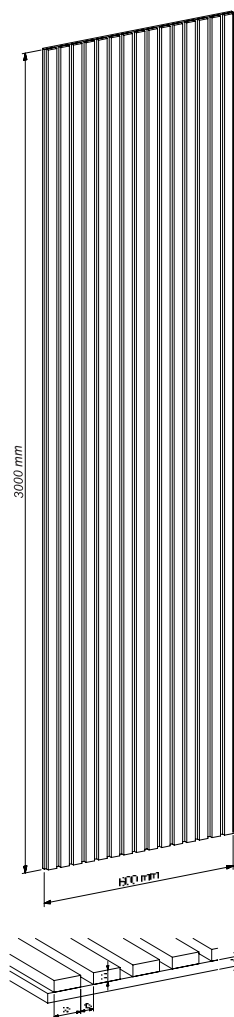

Figur 2:

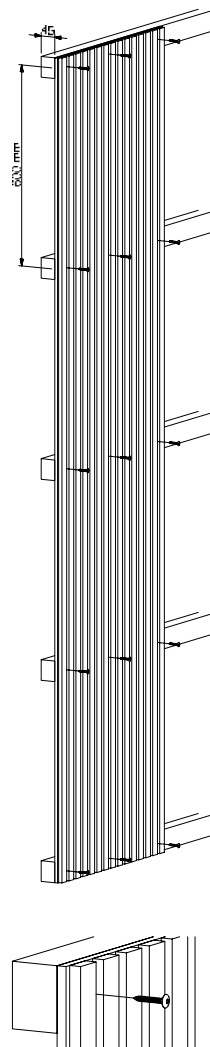

Frequency [Hz]	$\alpha_s$
100	0.09
125	0.22
160	0.30
200	0.53
250	0.56
315	0.87
400	0.99
500	1.97
630	0.97
800	1.02
1k	1.02
1.25k	0.91
1.6k	0.90
2k	0.87
2.5k	0.80
3.15k	0.81
4k	0.77
5k	0.71

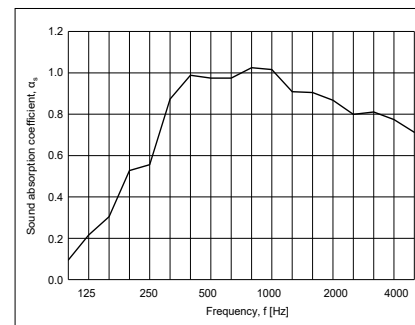


Lydstest Figur 3:

Montage: afstand 45 mm luft bag panelet.  
Lukket ramme omkring kant.

Testareal: 10,8 m<sup>2</sup>  
Rum-volumen: 215 m<sup>3</sup>  
Rum-overflade areal: 305 m<sup>2</sup>

Frequency [Hz]	$\alpha_s$
100	0.02
125	0.02
160	0.02
200	0.05
250	0.05
315	0.11
400	0.16
500	0.26
630	0.32
800	0.46
1k	0.63
1.25k	0.78
1.6k	0.97
2k	1.11
2.5k	1.05
3.15k	0.88
4k	0.75
5k	0.68

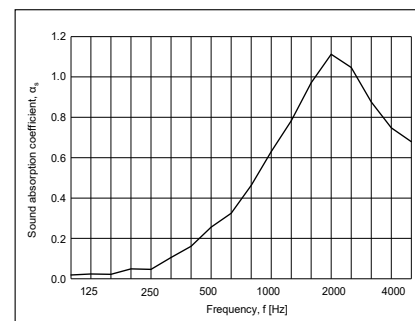

Lydstest Figur 4:

Montage: De 11 paneler ligger fladt på betongulv i ekkotest-rummet.  
Lukket ramme omkring kant.

Testareal: 10,8 m<sup>2</sup>  
Rum-volumen: 215 m<sup>3</sup>  
Rum-overflade areal: 305 m<sup>2</sup>